

Create Your Own DVD-Video!

How to create a DVD-Video using movies captured by “ImageMixer”

Preparation


Before creating a DVD-Video...

- Prepare a blank DVD-R or DVD-RW disc.
- Make sure that your DVD writing drive is compatible with “ImageMixer”. Please refer to http://www.imagemixer.com/e/sony/handycam/taiou_d.htm for compatible drives.
- Capture movies using “ImageMixer”. For capturing, refer to “Capture the Movie Shot by Your DVD Handycam!”.

1


Starting Video Disc Environment

Start “ImageMixer” and click the [Video Disc Environment] button in the Main Selector.



[Video Disc Environment] button

When “ImageMixer” has already been started and you are on a different environment, click the [Video Disc Environment] button in the Selector Bar on the top left of the screen.

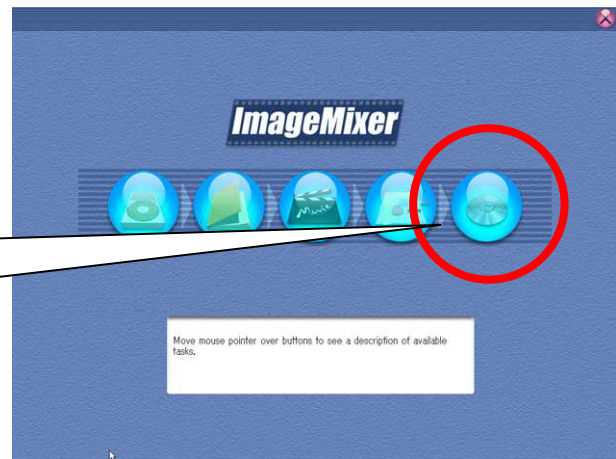


2

Setting project

Click the [New Project] button and select [DVD Video] in the window.




[New Project] button

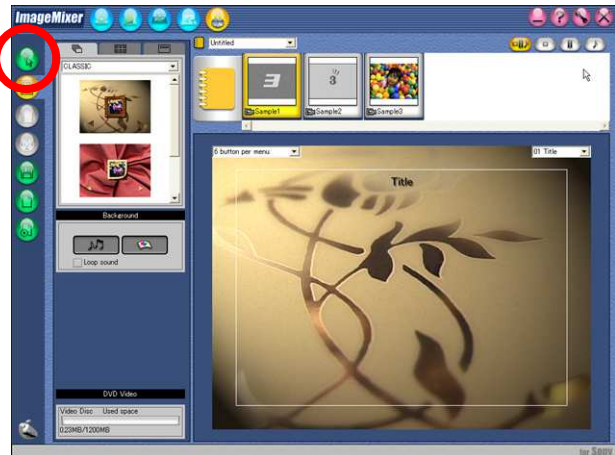

Click [DVD-Video].

【 Reference 】
When creating Video CD using CD-R, click [Video CD].

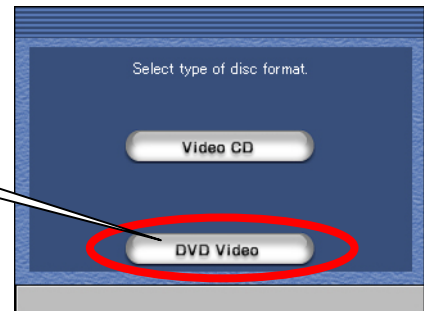


3

Selecting disc type

Click the [Preference] button and select DVD-R type in the window.



[Preference] button

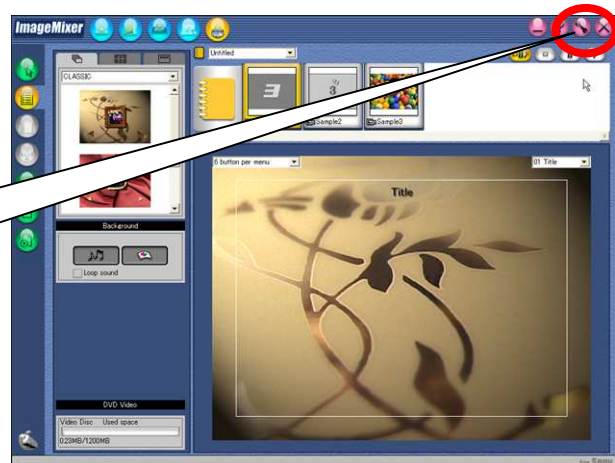

- 4.7GB
12cm DVD-R/DVD-RW disc
- 1.4GB
8cm DVD-R/DVD-RW disc

Disc Type:
 4.7G 1.4G

4


Arranging movies onto main menu

Drag and drop the movies displayed in the Content List.

Repeat the same operation if you want to add more movies.

【 Reference 】

Drag & drop operation is to left-click a movie and hold down the mouse button, then bring to desired position and release button.

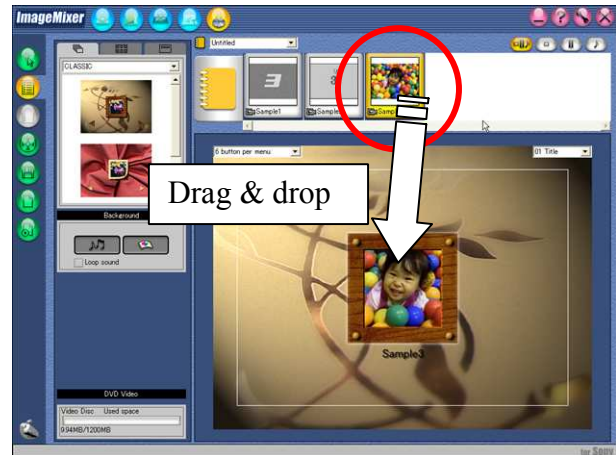

When you finish arranging movies, you can change the background and button design, or add music as you wish.

For details about creating a menu, please click the [?] button on the screen to refer to Help Manual.

5


Preview

Click the [Writing Environment] button.

When Writing Environment is displayed, confirm the content using Preview Panel.



[Writing Environment] button


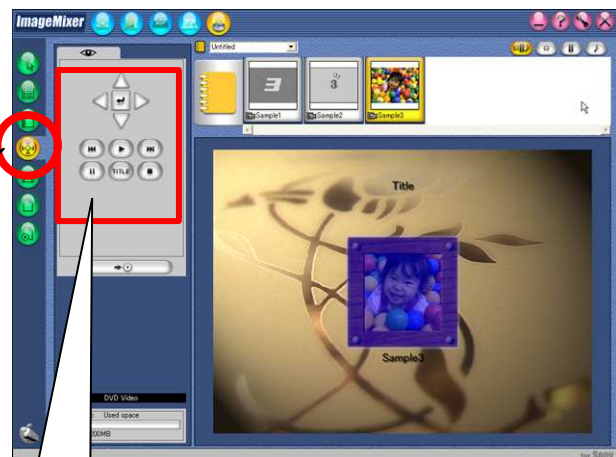


Preview Panel

6

Output

Click the [Output] button.

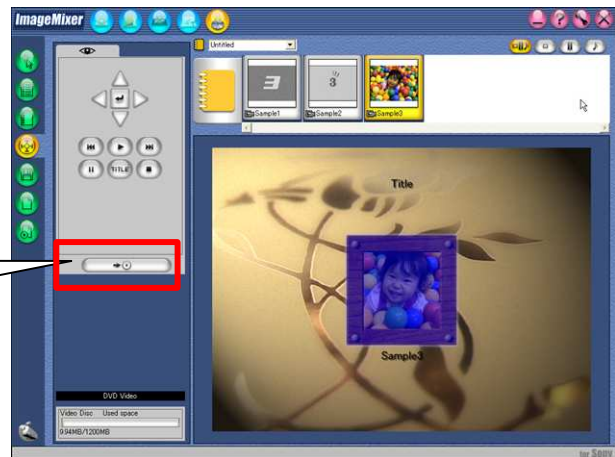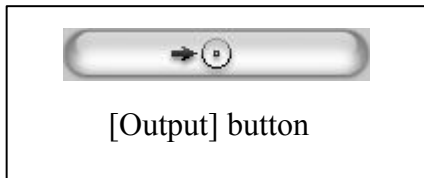

7

Settings for writing

Set each items in the [DVD Video Output] window and click the [OK] button.

●Disc name

Enter the disc name using alphabet and numbers (single byte).

●Output DVD image

Put a check mark to save DVD image.
You can set the save destination.

●Add operation guide

Put a check mark to add operation guide for DVD.

●Use interpolation for resizing images

If you are using a movie which image aspect is other than DVD-Video standard, put a check mark to prevent images from degradation.

●Create DVD


Put a check mark when you write to a DVD-R/DVD-RW disc.

●Destination device

Available devices will appear in the pull down menu. Select a writing device if there are two or more devices.

●Write & Simulation

Choose whether you want to test before writing from the pull down menu.

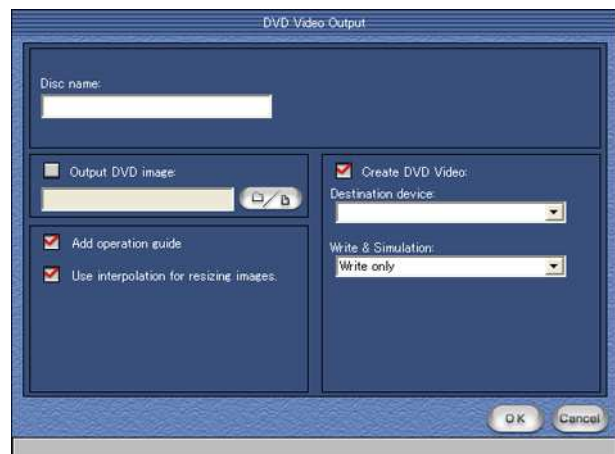

8

Inserting a disc

When a message saying to insert a disc appears, insert a blank DVD-R/DVD-RW disc and click the [OK] button.

Writing will start.

Disc will be ejected when writing is done.

【 Reference 】

Disc is not recognized right after inserting. Please click the [OK] button after few seconds.



Reference

Check following items if you cannot write a disc.

- Exit resident application

If other resident applications are running during writing, writing failure may occur. Please exit resident applications before writing.

- Conflict with other application

If other writing application(s) is installed, writing may not performed successfully due to conflict. If possible, please uninstall other writing application(s) and re-install "ImageMixer".

*Some writing applications cannot be re-installed. Please check if they are re-installable applications before uninstalling.

- Make sure that your drive is supported.

Please refer to http://www.imagemixer.com/e/sony/handycam/taiou_d.htm for compatible drives. Also, some drives are added as updating. Please update at;

<http://www.imagemixer.com/e/sony/handycam/dl.htm#update>